


*** All Pavement, Including All Shoulders**

- ① 90 kg/m² HMA Surface 9.5 mm
- ② 150 kg/m² HMA Intermediate 19.0 mm
- ③ 240 kg/m² Minimum HMA Base 25.0 mm
- ** ④ 250 kg/m² QC/QA-HMA Intermediate OG25.0 mm
- ⑤ 240 kg/m² HMA Base 25.0 mm
- ⑥ Subgrade Treatment
- ⑦ Variable-Depth Compacted Aggregate, No. 53
- ⑧ Pipe, Type 4, Circular, 150 mm

* Open graded mixtures OG19.0 mm or OG25.0 mm should be QC/QA-HMA, 5, 76. For all other mixtures, see Section 52-9.02 to determine the appropriate HMA mixture designation.

** Where underdrains are not required, Intermediate OG25.0 mm mix should be replaced with HMA Base 25.0 mm, minimum 270 kg/m².

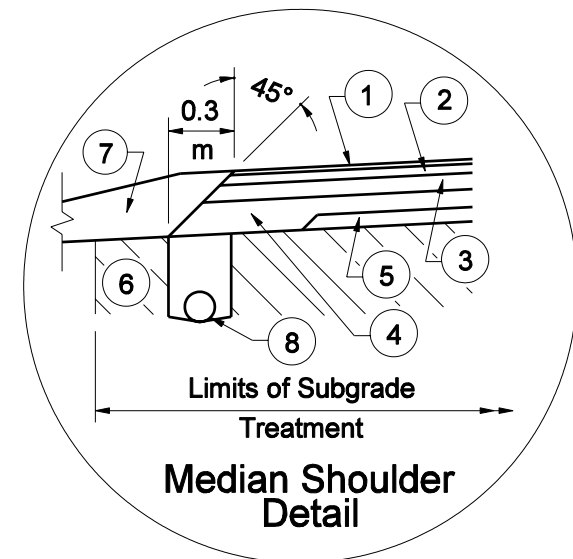

**FULL DEPTH HMA PAVEMENT,
≥ 30 MILLION ESALs
Figure 52-13A**